


## Ordering code: Contactor for battery voltages



Type C contactors are NO contactors fitted with magnetic blowout. Here the NO contact functions as circuit-breaker within an open contact design.

Type H contactors, however, feature an additional NC contact which is galvanically isolated and has a potential of its own. So, for type H SPDT contactors is to be observed that only the NO contact may be used for breaking the circuit, whereas the NC contact should only be used for power transmission functions.

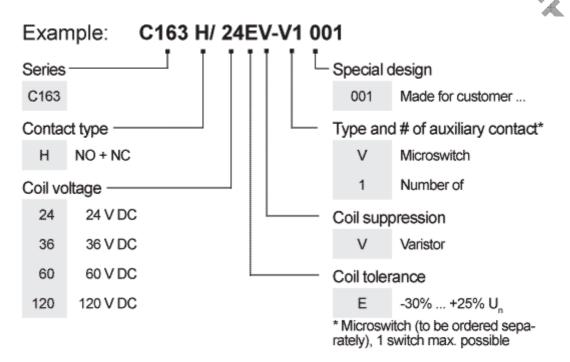