


## Ordering code: Contactor for battery voltages



Type S contactors are DC NO contactors fitted with magnetic blowout. Here the NO contact functions as circuit-breaker with high breaking capacity in an enclosed space.

Type W contactors, however, feature an additional NC contact which is galvanically isolated and has a potential of its own. So, for type W SPDT contactors is to be observed that the NO contact is designed for breaking the circuit. The NC contact, in contrast, is designed for carrying lesser loads.

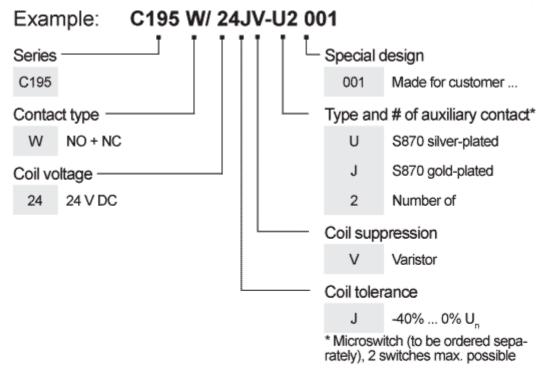