




INSTANTANEOUS AND FUNCTION RELAYS


Instantaneous relays 4 contacts / 1246

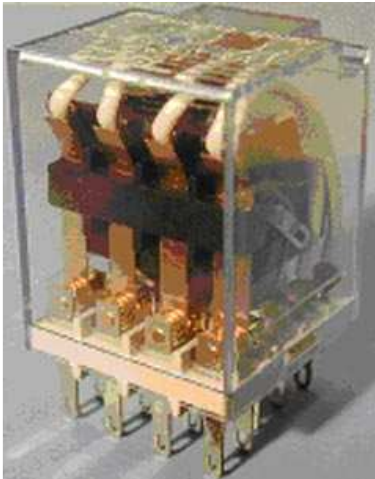

TEC

1246

- ▶ rear wiring socket with clips 9246
- ▶ front wiring socket with clips 9946-20
- ▶ front wiring socket / screw terminals 9946-10




DESCRIPTION ▶

Instantaneous relay 4 CO contacts.


Pluggable on front wiring socket (9946) or rear wiring socket (9266)

The detailed table of coil resistance data is available in the technical support pages of this site or can be sent upon request.

Dimensions

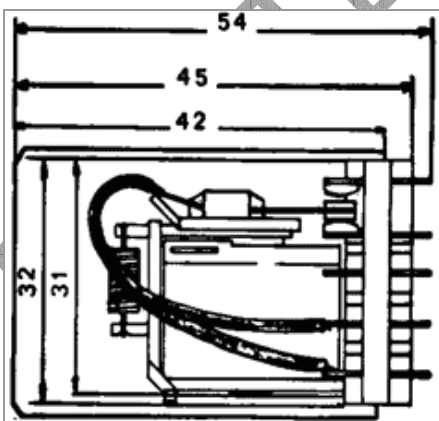

Connection

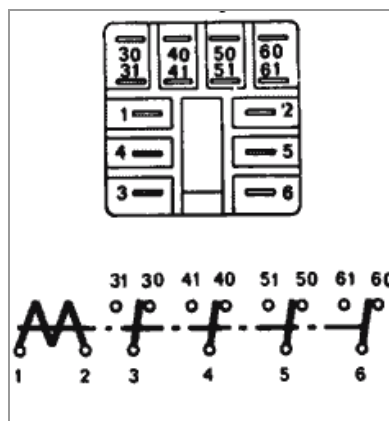

TECHNICAL FEATURES ▶

Function	Instantaneous
Presentation	under cover
Connection	on front or rear wiring sockets
Number of mechanical operations	10.000.000
Operating temperature	- 10 to + 40°C

Storage temperature	- 40°C to + 85°C
Climatic protection	reinforced climatic protection
Shock voltage	15 g - 11 ms
Dielectric strength	2,5 KV-50 Hz-1 min at 40°C and 70% HR
Insulation resistance	200 MOhms
Weight	73 g.

COIL DATA

	Direct current	Alternative current	
Min. nominal voltage DC	6 V	6 V	
Min. nominal voltage AC	220 V	400 V	
Operating range	-15/+10% of nominal voltage		
Power requirement	2,2W	5 VA	3 VA


CONTACTS

Number of contacts	4 RT
Contacts material	silver alloy with gold flash
Max. load current	8 A per RT
Low power switching	40 mA min for 6 V
Short-circuit load	250 A / 30 ms
Response time	DC < 12 ms - AC < 17 ms
Bounce time	< 7 ms


CONTACTS RATING

DIRECT CURRENT

resistive load

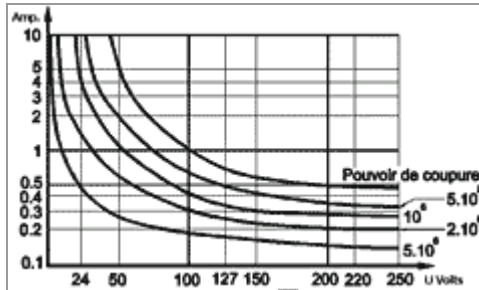


inductive load L/R = 20 ms

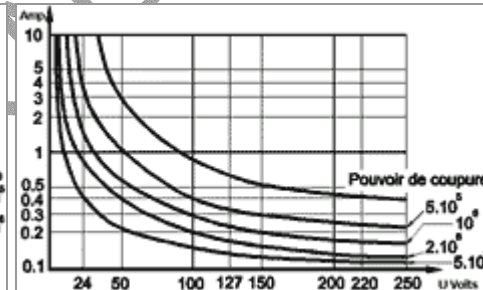


ALTERNATIVE CURRENT

resistive load

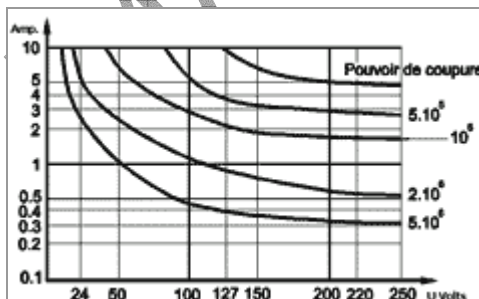

inductive load cos phi = 0.7

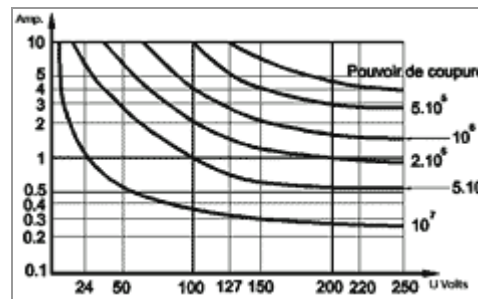

VERSIONS

Available in "SECURITY RELAY" version with linked contacts - **Please contact us.**



İmaj Teknik Elektrik Elektronik San. ve Tic. Ltd. Şti.
EMEYEMEZ MAH.TUTSAK SOK. NO: 16/13-14-15
KARAKOY/İSTANBUL
TURKEY

Telefon : +90 212 235 9535 / 36 www.imajteknik.com
Fax : +90 212 235 9537 www.imajteknik.com.tr